Global Warming Due to Albedo & Humidity Hydro-Hotspots Forcing Alec. Feinberg, DfRSoft

Vixra 1910.0002

Abstract

Understanding root causes is always needed to find proper solutions. In climate change, we must ask, what has historically changed? Besides CO_2 , we have a change in the specific and relative humidity, slight decrease in land albedo, and yearly growth of Hydro-HotSpots (HHS). We denote hydro-hotspot as water evaporation and bulk heating from low albedo manmade type roads and cities surfaces, including cars and engine hoods. This includes both Highly Evaporating Surfaces (HES) and bulk warm Rain Water Management (RWM). This is Humidity Forcing (HF) related to Albedo forcing and the creation of HHS. Most significant is land albedo forcing. Modeling provided are in agreement with other authors that Albedo forcing due to cities and roads are a major effect on global warming. This also feeds most of the HHS' which are concentrated hot areas (as well there is combustive areas such as car engine hoods), which could account for most of global warming trends.

We show in this article that such surfaces, while seemingly only covering only about 1% of the Earth, can have very large effective solar areas, and evaporation areas many times the size of the HES and RWM area itself compared with higher albedo absorbing vegetative areas that also include transpiration. This is significant since water vapor is the most potent greenhouse gas. City surfaces can prove to be enormous when tall buildings are considered. In addition, Hydro-hotspots generate high kinetic energy molecules in the troposphere which can decrease relative humidity while increasing specific humidity. It is thought that global warming ocean evaporation- CO_2 feedback is the key contributor, but in this paper other issues are considered. For example, we find that it is nontrivial to look at changing the albedo of cities and roads as possibly a major solution to global warming.

Also alarming is warm rain water management. For example, New York City dumps an estimated 27 billion gallons of waste water into the ocean each year. This pattern is followed by cities all over the world. This water is often warmed by hot city streets and buildings having high heat capacities. This is also lost land water storage as urban impermeable surfaces increase. Numerous concerns are pointed out: 1) warmer runoff to streams/ocean water, 2) loss of wetland storage in vegetative areas, 3) loss of land evaporation and precipitation, 4) increase in ocean precipitation creating higher land temperatures, and 5) dryer drought-prone regions. This is key as change in global warming goes as the change in specific and relative humidity which are functions of CO_2 , other GHGs, and as described here, HHS.

1. Introduction - Highly Evaporation Surface and Rain Water Management Feedback

In this paper we look at the effect of Hydro-HotSpots (HHS) from Highly Evaporating Surfaces (HES) feedback (Figure 1) and Rain Water Management feedback (Figure 2) contributions to global warming.

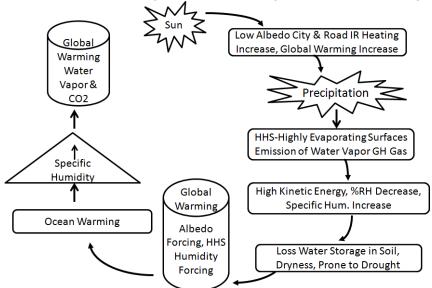


Figure 1A HF-HHS-HES feedback view of contribution to global warming

Figure 1A HES feedback may be summarized as follows:

- Low albedo forcing increase in cities and roads absorbing sun light and increase in IR and some global warming effects
- Appendix D & E shows that if the Earth's albedo goes from 29 to 28.8 [16], this equates to a 0.32°F Rise in temperature.
- Appendix E shows that such a change can occur form low albedo city and road growth
- Precipitation occurs, followed by evaporation of HES moisture often with high Kinetic Energy (KE) water molecules from hydro-hotspots (wet hot surfaces)
- HHS temperatures decrease local %RH (see Appendix G) and a higher increase in the specific humidity
- Loss of water storage due to replacement of vegetative areas with cities and roads
- Increase in local dryness and some correlation to the potential for drought
- Global warming increase due to albedo forcing and intern higher specific humidity GH gas ocean temperature rise creating more evaporation and higher specific humidity with some CO2 feedback as well.
- More greenhouse gas in the form of moisture and eventual further warming.

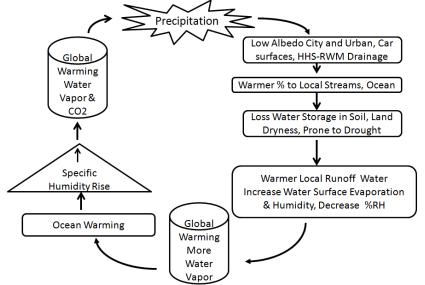


Figure 1B HHS Rain Water Management (RWM) feedback in Climate Change

Figure 1B HHS-RWM feedback may be summarized as follows:

- Precipitation is collected off of HHS buildings, streets and hot cars
- A large percentage is drained to ocean or nearby rivers that may end up in the ocean
- The impermeable city building and roads have replaced vegetative land creating lost area that would have stored cooler water in soil keeping the land moist.
- This increases land dryness and can mean less land evaporation and more ocean rain.
- The RWM is often warmer from HHS than streams and ocean water and may contribute to local surface water temperature increase depending on location. Possibly warmer environment may runoff more water to the ocean due to population trends. This requires some studies.
- This above HF effects would contribute to a global warming feedback cycle and rising specific humidity and drought prone areas due to runoff distances.

In Section 2 we provide Models for Albedo and Humidity forcing, in Section 3 we overview relevant data, in Section 4, we discuss details of HHS-RWM, including how lost wetland water storage is correlated to dry days and possible drought, in Section 5 we discuss reasons why CO2 is perhaps not a full solution to Global Warming (GW) problems and in Section 6 we provide a brief summary, conclusion and suggestions.

2.0 Albedo & Humidity Hydro-Hotspots Forcing Models

In this section we provide albedo and humidity forcing modeling to illustrate and strengthen the concept shown primarily in Figure 1A.

2.1 Albedo City Forcing Modeling to Illustrate Literature Agreement - Global Warming Partial Solution When we ask what has change since 1950, we need to consider an albedo forcing due to roads and city surfaces. As we build cities, we increase the effective solar area of the Earth. There have been numerous studies on Urban Heat Island (UHI) effects. We focus only on a few publications that found significance in UHI contribution to global warming. McKitrick and Michaels [18] found that half of global warming trend from 1979 to 2002 is caused by UHI. Research in China [19,20] indicates that UHI effects contributes to climate warming by about 30%. There is an apparent push-back as little attention to date is on changing city albedo's forcing as a major solution to global warming, as the focus mainly been on CO_2 . Here we can show with some basic albedo modeling that cities and roads are likely a large contributor to global warming, in agreement with these few studies [18-20].

The main criteria needed for this modeling are estimates of the surface area covered by cities and roads and an effective albedo. GRUMP [19] that found about 0.9% coverage is of the Earth is by urban area. This study was done in 2010 and was somewhat disputed. Nevertheless we are using a starting value slightly larger of 1.2% as a 2019 first approximation. Along with this estimate, we need some sort of adjustment for solar surface area needed to account for city building sides.

This increase is hard to quantify and certainly merits studies. As a rough estimate for this model, we assume each building sides equates to 10x the bottom surface area due to having 4 sides and their height. Assume now that buildings take up 45% of a cities area. Using the 1.2% of the Earth surface are cities estimate, we then have 1.2%x55%+1.2%x45%x10=6% of the Earth's surface could show an increased from 1.2%. If 50% of this is illuminated on building sides, this is 3% in solar heating area compared to 1.2% estimate (a factor of 2.5 increases in urban solar area). In 1950 we used 0.48% for the city surface area yielding, (0.48%*0.55+.48%*0.45*10)x50%=1.2% for the 1950 value. Here we have probably inflated the value in 1950 to be conservative as this actually diminishes the effect from 1950 to 2019 for city surface area yielding only a 2.5 factor increase.

In Appendix F we also provide a "what if" we could change the 2019 albedo of roads and cities to 0.5. Table 2 summarizes the findings in Appendix F

Year	Surface Area of Cities	Albedo Roads	Albedo Cities	Global Albedo	Temperature Budget
1950	1.20%	0.04	0.12	29%	0.2°F
2019	2.95% *	0.04	0.12	28.69	0.7°F
2019	2.95% *	0.5	0.5	29.43	-0.5°F

Table 2 Appendix F Results of Expected	I Temperature Budget With City	y Surface Areas and Albedos
--	--------------------------------	-----------------------------

*City surface area increase due to building sides. Estimate in Section 3.

Although the models in Appendix F and on city surface estimate are crude, they demonstrate the need for feasibility studies further support to the cited authors [18-20]. From the crude modeling we have shown:

- Actual shift from 1950 may be 0.5°F (0.7-0.2) due to Cities & Road increases, which is 33% responsible for global warming in agreement with References 18-20.
- A "what if" results that shows if we changed the albedo to 0.5 of cities and roads, total shift is 1.3°F {0.7-(-0.5). This almost solves global warming problem
- Due to improvements of specific humidity (see next section), it should actually solve most of the problem.

Overall this demonstrates that it would be non trivial to require that cities be mandated to improve their reflectivity requiring all buildings to has a higher albedo. We see that with the HHS-HES issues and this albedo change, is likely non trivial to requiring cities worldwide to be more reflective. With the infrared technology today, it is easy to pinpoint urban island buildings that are problematic and mandate changes.

2.2 City & Asphalt Hydro-Hotspot Lowering of the Local Relative Humidity Example

If the ambient temperature when it rains is 27°C and 98%RH and the HHS surface temperature is 87°C (black asphalt, see Table 1), then the local relative humidity at the hotspot surface is reduced from 98%RH to 5.6%RH. This is shown in Appendix G. Such cumulative effect from buildings and streets in a city likely will lower city's equilibrium relative humidity compared to nearby rural areas. The correlation to lowering relative humidity and global warming is well established and some are provided in Section 2.3 and data presented in Section 2. Studies are required to measure this effect in city urban heat islands.

2.3 HHS-HES Effective Area of Evaporation Change from Soil

In addition to the increase in solar heating area in cities, one must understand the HHS-HES areas are increasing with growth of cities and roads. This increase moisture evaporation is tied to the increase area and the effective evaporation change since 1950 which occurs due to replacing soil with impermeable surfaces.

A simplified expression for the equivalent HHS-HES area found in Appendices A, B, and C roughly given by

$$A_{EfHES} = \left(\frac{t_{Soil}}{t_{HES}}\right) A_{Soil} = \left(\frac{t_{Soil}}{t_{HES}}\right) \left(A_{HES} - A_{HES-\%IG}\right)$$
(7)

Where

A_{EfHES}=Effective HHS-HES area,

A_{Soil}=soil area, this is set equal to an equivalent to A_{HES} area, subtract from

A_{HES-%IG} any % run off of irrigated water falling on the roads or city surface areas to vegetation areas

 t_{Soil} is the evaporation time of the soil

 t_{HES} is the evaporation time of the asphalt or city surface after precipitation occurs.

As an example, if it takes a road 2 hours to evaporate a volume of water from a road, while it take soil 48 hours to evaporate the same amount of water in soil, than the effective soil land lost is a factor of 24 times contributing to the evaporation rate and specific humidity. This example is for roads with zero percent irrigation-equivalent area running off water to adjacent land.

The factor $\left(\frac{t_{Soil}}{t_{HES}}\right) = \Delta R$ provides an evaporation rate related to the time rate of change. In the above

example we see that the rate would be 24 times faster than if roads were not constructed. In the appendix this rate is shown as a function of

- HHS-HES from cars: This effect may be significant as car surface area temperatures vary with color and hood temperatures. As well, unlike cities that cool-off at night, hood temperature in the rain still create HHS'. This also causes hot runoffs. As well there are likely other combustive areas. (see solutions).

2.4 Specific Humidity Sources – HHS-HES & HHS-RWM

The key question about specific humidity is, "Where has the increased humidity come from, and how do we account for the global warming trends?" It is thought that CO_2 initially increases the planet's temperature which increases ocean evaporation and thus specific humidity followed by higher temperature rise. It is this feedback mechanism that climatologist claim is entirely responsible for the increase in specific humidity and subsequent justified full temperature increase. This feedback mechanism has been argued. Such a correlation has been described [1,2,3]. However, such assessments view the correlation with CO_2 creating warming to the ocean as the cause rather than looking at other sources to specific humidity that have increased with time. The apparent land albedo decrease, due to increase in highways and city area HHS effects, and city and urban HHS-RWM water drainage increase away from land has not fully been studied. All these play a role in specific humidity, relative humidity and precipitation effects.

• Here we are concerned with a likely correlation of global warming and increase to Asphalt and aggregate building material usage

We discuss that HHS-RWM can markedly affect relative humidity (see Appendix G).

Water vapor is known to dominate greenhouse temperatures effects [3, 4]. Such an inference would then create a strong feedback mechanism as illustrated in Figures 1 above.

2.3 Basic Global Warming Relationships Over Land – CO₂ versus HHS Effects

Sumerous authors have illustrated that global warming is dominated by moisture content in the atmosphere [see Byrne et. al. and references therein]. This can be expressed with relationships of specific humidity h, and relative humidity r. For example, Byrne et al. [1] observe GW_L temperature over land increase of $0.17\pm0.04^{\circ}K$ per decade, a specific humidity (h_L) increase over land of ($0.08\pm0.04g\cdot kg^{-1}$ per decade), and a relative humidity (r_L) linear decrease trend of $-0.22\pm0.20\%$ per decade. Using these observations, we can formulate some functional relationships to understand global warming change with specific humidity in the atmosphere as

$$\frac{dGW_L}{dh_I} = \frac{dGW_L}{dt}\frac{dt_2}{dh_I} = \frac{0.17}{0.08} = 2.13$$
(1)

As well this provides an opportunity to write the time rate of change of Global warming with the time rate of change in specific humidity increase in the atmosphere

$$\frac{dGW_L}{dt} = 2.13 \frac{dh_L}{dt}$$
(2)

Similar to (1) we can write the change in global warming over land with the change in relative humidity r over land

$$\frac{dGW_L}{dr_L} = \frac{dGW_L}{dt}\frac{dt_2}{dr_L} = -\frac{0.17}{0.22} = -0.77$$
(3)

This also provides an opportunity to write the time rate of change of global warming with the time rate of change in relative humidity decrease in the atmosphere as

$$\frac{dGW_L}{dt} = -0.77 \frac{dr_L}{dt} \tag{4}$$

From our conjecture of the sources of these changes in the atmosphere related to greenhouse gasses and our new assertion related to HHS, then the change in r_L and h_L in the atmosphere is some function of $CO_2(T_{rad},O_f)$, HHS(Albedo,p) and other GreenHouse Gasses (GHG_{other}(T_{rad})), that is

$$\frac{dr_L}{dt} \sim \frac{dh_L}{dt} \sim \frac{df \{CO_2(T_{rad}, Oc), HHS(Albedo, p), GHG_{other}(T_{rad})\}}{dt}$$
(5)

Here p is the precipitation, T_{rad} is the increase in temperature due to re-radiation of CO₂ IR back to Earth, O_r is the ocean feedback that creates an increase GH moisture gas evaporation due to rising temperature of the CO₂ re-radiation. We can summarize these general relationships on global warming change over time having the form

$$\frac{dGW_L}{dt} = -k_r \frac{dr_L}{dt} = k_h \frac{dh_L}{dt} \sim \frac{df \{CO_2(T_{rad}, Oc), HHS(Albedo, p), GHG_{other}(T_{rad})\}}{dt}$$
(6)

where each k is a constant that varies with measurement accuracy. It is important to note that CO_2 in general goes into the atmosphere primarily from land. Therefore, for this feedback to occur, the CO_2 must spread into the atmosphere across the ocean sky area, and then eventually, the ocean gets warmer, which in turn creates ocean evaporation. This is in contrast to the more direct effect of HHS which occurs only over land. On the other hand, we note that HHS is also a function of precipitation. HHS requires a combination of sun absorption and timely precipitation which reduces its influence.

3. HHS-HES Supporting Related Data Trends

The following data and analysis are summarized that supports HHS-HES feedback:

- **HHS-HES Areas on Average are Hotter:** When evaporation occurs from cities and roads, the albedo is on average lower by comparison to vegetative areas that are replaced. Often evaporation is then from hotter surfaces, molecules then have higher kinetic energy, this expands air and decrease relative humidity (see Appendix G). Even when surfaces are not hotter, the evaporation rate increase is associated with higher entropy, higher specific humidity and lower relative humidity. This is discussed in Section 4.
- **HHS-HES area effect**: A simplified analysis is presented in Section 2.3 illustrating when all things are equal, the area lost from soil water storage due to roads and cities, for example is given primarily by the differences in evaporation times between the would be vegetative area and the city or road replacement area. The example is given there that if it takes a road 2 hours to evaporate a volume of water from a road, while it takes soil 48 hours to evaporate the same amount of water in soil, then the effective soil land lost is a factor of 24 times, contributing to the HHS evaporation rate, specific humidity and global warming emitted moisture greenhouse gas. Although we have not formulated this rate related to transpiration, the rate should still apply.
- **HHS-HES city area effects**: As we build cities, we increase the effective solar area of the Earth. The increase is hard to estimate. A rough estimate was provided in Section 2.1.
- **Specific Humidity Rising:** Figure 2A shows the increase in specific humidity not just to warming oceans but also over land mass. Overall, water vapor in the surface atmosphere has increased over land and ocean since the 1970s (specific humidity is rising) [5], while the atmosphere over land is becoming less saturated (relative humidity is dropping) [5].

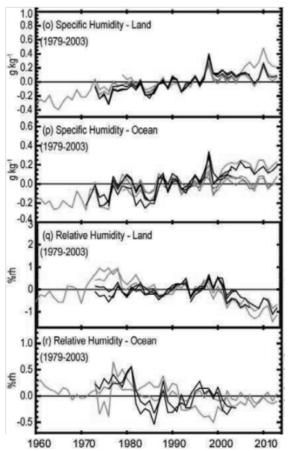


Figure 2A Top two figures shows the specific humidity over land and water both increase while the third figure showing the relative humidity decreasing trend primarily over land while the ocean is more stable but likely harder to measure [5].

• **Precipitation:** Figure 2B illustrates that precipitation has remained constant [5] even though the specific humidity has increased. However in Fig. 7 and 8 we see that in later years it is actually increasing.




Figure 2B A fairly constant precipitation rate in view of the fact that the specific humidity is increasing [5]. In later years Fig. 7, shows precipitation eventually increasing.

• Soil Moisture: Figure 3 shows a decrease in soil moisture [5] likely suggesting a correlation to global warming. This increase in dryness is made worse from HES areas in cities and roads increasing over time.

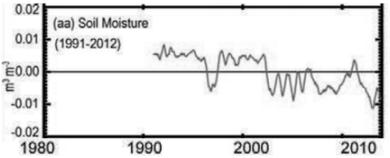


Figure 3 Loss of soil moisture likely due to global warming over land [5]

• Albedo decline: In Figure 4, a decline in land albedo [5] is found. One would expect this decrease over land due to the increase in roads and city areas having a much lower albedo value than natural vegetative areas. Global albedo loss has been blamed on glacier loss but here it is illustrated just for land.

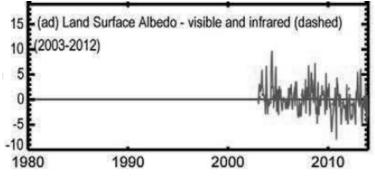


Figure 4 Loss of albedo over land likely due to increase in cities and highways [5]

• Increase in Asphalt use: Figures 5 and 6 show an increase in asphalt use (2009-2012) and increase in highway miles (1923-2009), respectively [6,7]. Although the data is limited on asphalt and highway growth, the trend is clear. Climatologists correlate the rising CO₂ greenhouse gases to global warming. Here one could just as well correlate the rising use of asphalt to global warming via contributions from the HES effect and emission of greenhouse water vapor gas.


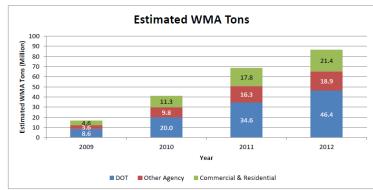


Figure 5 Growth of Warm Mixed Asphalt Usage per year (2009-2012) in USA [6]

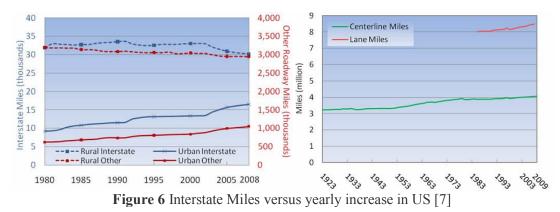

• **Specific Humidity Trends and Correlation to Global Warming:** Figure 7 shows specific humidity trends and Figure 8 illustrates the correlation through 2017 from various sources [8]. Here the author does not differentiate between specific humidity and precipitation.

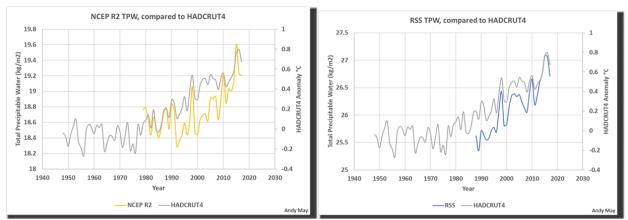


Figure 7 Specific humidity and global warming trends from two different agencies [8]. Here the author does not differentiate between specific humidity and atmospheric precipitation.

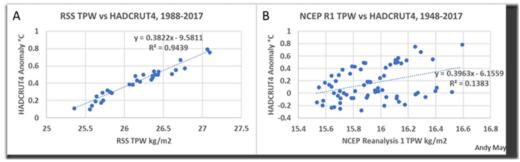


Figure 8 Correlation of specific humidity - Total Precipitation Water (TPW) for different data with global warming [8]. Here the author does not differentiate between specific humidity and atm. precipitation.

The primary effect that we are looking at with respect to data is a possible contribution to the evaporation rate and its effect on the rising specific humidity in the troposphere (lower 10 miles of atmosphere). Other related effects are likely dry conditions that are a necessary but not sufficient condition for drought. Hot roads and city walls also expand air and not only drive up specific humidity during precipitation but lower %RH (Appendix G). One other critical effect that is hard to calculate is loss of plant water storage and transpiration. When impermeable surfaces replace vegetation, the rate of evaporation is exceedingly high compared to transpiration which is said to account for 10% of all evaporation [9]. Climate change is then hard to predict. Lost wet lands can lead to dry condition with less increase in specific humidity.

4. Data on Rain Water Management (RWM), Drought, Global Warming Trends

Rainwater management may be an important factor. It can also impact where it rains! Rain follows local evapotranspiration. Apart from precipitation, evapotranspiration is the major component in the hydrologic budget. If ocean precipitation increases, then land precipitation can decrease.

When it rains in a city, much of the land in urban areas is covered by pavement or asphalt. Because rain can't soak into the soil underneath, these covered areas are impermeable surfaces. As the amount of impermeable surface increases with urbanization, so too does the amount of runoff. As an example, in urban cities 30% is often estimated for evapotranspiration, 10% shallow soil infiltration, 5% deep soil infiltration, and RWM takes 55% into runoff.

- The New York Environment Report, in 2014 reported [10], "Every year, old sewers flooded by storm water release more than 27 billion gallons of untreated sewage into the New York Harbor alone."
- Fry et al [11] reported that in February of 2019 California estimated that 18 trillion gallons of rain in February alone had most of the water going to the Pacific Ocean. The article goes on to point out the LA dept. of water captured 22 billion gallons of water during recent storm.

As roads and cities have increased, so too has the albedo decreased, in cities like LA, HHS-RWM runoff can have major impact on local ocean temperature increase and evaporation from its surface. Land can also become dryer as there is less water storage in wetlands as shown in Figure 1B. As the water storage is shifted from the land to the ocean, local precipitation could hypothetically be affected. The precipitation could change to more over the ocean and less over the land. This could make the local area more prone to drought and higher average temperatures. When it does rain over drought areas, the runoff is warmer and will eventually create more evaporation either during the runoff or when dumped into local ocean areas which could affect moisture greenhouse gas. This could create a feedback cycle of higher temperature on land and again warmer runoff see Fig. 1B.

Here we cite examples on some studies that found correlations to wetland and rain. Such studies can depend obviously on climate of the area. However, these examples show the importance in losing wet land (water storage).

Cao et. al. [12] did a study on wet land reduction in China and correlation to drought with the following conclusion

• "The wetland distributions and areas of the five provinces of southwestern China in the 1970s, 1990, 2000 and 2008 show that the total reduction of wetland area was 3553.21 km² in the five provinces of southwestern China from 1970 to 2008, accounting for about 17% of the ground area, and thus the average annual reduction area is about 88.83 km². The reduction rate was comparatively fast from 2000 to 2008 with an average annual reduction of 329.31 km². The changes to the wetland area show a negative correlation with temperature (i.e. wetland decrease,

increase in temperature), and a positive correlation with precipitation (i.e. wetland decrease, precipitation decrease)." [12]

Hirshi et al. [13] did the following study

• "We analyzed observational indices based on measurements at 275 meteorological stations in central and southeastern Europe, and on publicly available gridded observations. We find a relationship between soil-moisture deficit, as expressed by the standardized precipitation index, and summer hot extremes in southeastern Europe. This relationship is stronger for the high end of the distribution of temperature extremes. We compare our results with simulations of current climate models and find that the models correctly represent the soil-moisture impacts on temperature extremes in southeastern Europe, but overestimate them in central Europe."

Below is the graph from their study [13]. It shows a negative linear relationship between wet land decrease and dry day increase

where k is the slope related to the dryness. Here we have taken some liberties and generalized it to include water runoff.

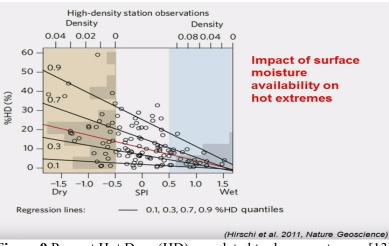


Figure 9 Percent Hot Days (HD) correlated to dry vs wet areas [13]

• Hiyama et. al, investigated the origins of rain- and subsurface waters of north-central Namibia's seasonal wetlands, analyzed natural stable water isotopes (SWIs) of hydrogen (HDO) and oxygen (H₂¹⁸O) in rainwater, surface water and shallow groundwater. Rainwater samples were collected during every rainfall event of the rainy season from October 2013 to April 2014. The isotopic ratios of HDO and oxygen H₂¹⁸O were analyzed in each rainwater sample and then used to derive the annual mean value in precipitation weighted by each rainfall volume. Results showed that around three-fourths of rainwater was derived from recycled water at local-regional scales.

As another example, it is found that in large areas of the Southwest, evapotranspiration is virtually equal to 100 percent of the precipitation, which is only about 10 inches per year [9].

By contrast, in the conterminous United States, the estimated mean annual evapotranspiration is greatest in the Southeast (about 35 inches per year or about 70 percent of the precipitation), which is an area of abundant precipitation, permeable soils, and substantial solar radiation; it is least in the semiarid region of the Southwest where precipitation is limited. The ratio of estimated mean annual evapotranspiration to precipitation is least in the mountains of the Pacific Northwest and New England where evapotranspiration is about 40 percent of the precipitation [9].

Some efforts have been made to improve storm water innovation in RWM. The effort is called LID [14], "Low Impact Development (LID) is a planning and design approach that aims to mimic naturalized water

balances. It combines infiltration, evaporation and transpiration while limiting runoff. The goal of LID is to restore processes that are lost in a built-up urban environment. LID includes several types of low-level new and innovative storm water technologies that together let water infiltrate the ground and evapotranspire into the air. However, no efforts have been made to cooling HHS.

4.1 RWM Effect on Oceans

Rising oceans' levels are anticipated with global warming due to the fact that the ocean expands as it warms. Its levels also will increase due to glacier melting. However, it doesn't help to have RWM also contributing from cities all over the world with water runoffs into the ocean. Prior to the industrial revolution, much of this water went to natural vegetation, streams and lakes. Urban and city are typically few degrees hotter and HHS-RWM may be instrumental in local water temperatures. RWM runoff into the ocean's of course also created a reduction of wet lands. Shifting precipitation from land to over oceans is a large concern. Most climate models do not agree on precipitation and drought areas as climate is hard to predict [15].

"The average of the models shows large increases in precipitation near the equator, particularly in the Pacific Ocean [15]"

It would be close to impossible to tell if RWM has a direct bearing on precipitation in certain areas. However, we have illustrated a number of studies that suggest logically that HHS-RWM is very important.

5. The Contention against CO₂ Feedback Being Solely Responsible for Specific Humidity Increase

There are certainly difficulties in understanding the CO2 effect relative to moisture. What is needed is a very good simulation experiment. While there are an abundant number of CO2 complex experiments in the literature, it is hard to point to a few that demonstrated simply and unequitably that going from 300 to 400 ppm could produce the appropriate temperature rise. This experiment, if it does not exist, seems hard to find in the literature. Certainly while non trivial, such an experiment seems feasible and important. Here are some logical reasons why a precise experiment, which may have already been done properly somewhere in the literature, but it would be helpful to understand CO2 exact contribution to GW:

- Some authors have argued that CO2 is 400 PPM while water vapor is 25,000 ppm (on average at 25km). Yet climatologist claim that roughly 1/3 of the GW increase is due to CO2. It seem climatologist are possibly assuming that only CO2 is the primary change and water vapor is a secondary ocean increase effect due to ocean warming. Here we have shown that because albedo forcing in cities and roads increase has also taken place, that CO2 may play less of a role; hence, water vapor is a more powerful greenhouse gas.
- If we allow for a small change in the Earth's Albedo from 29% to 28.8%, and use the climatologist claim that about 1/3 of the non albedo temperature change is due to CO2 and 2/3 to water vapor, we can show with basic modeling (Appendix D &E):

 Δ Temp. Increase= Δ Albedo Decline + Δ CO2 + Δ H2O= 0.32°F+0.42°F+0.86°F=1.6°F

One can also estimate the fossil fuel contribution to global warming, and it is negligible since 1950. It adds <0.02 W/m2 out of the 4.1 W/m2 which would be the global warming energy change today. If one translates this in terms of CO2 energy, the energy to create a CO2 byproduct of fossil fuel increase from 300 to 400 ppm, is significantly small amount of creation energy compared to the global warming energy needed. That is, we have a miniscule amount of global warming energy creating CO2 byproduct, which in turn is believed to create a major global warming energy change? Although the mechanisms are completely different, it does show the difficulties in understanding how CO2 could have such a GW amplification strength impact.

6. Summary - Solutions

From data and analysis, we do not anticipate that solving the CO_2 problem will fully stop global warming form occurring. We find that it is highly likely that HHS-HES areas and HHS-RWM are contributing to global warming, and that more studies are needed to assess the impact and how much it is contributing compared to the CO_2 feedback mechanism.

HHS-HES and HHS-RWM Reduction Suggested Solutions

- Further studies are required on Humidity Forcing to understand the contribution to GW
- Change Albedo of roads and cities will reducing HHS and the area effect dramatically, i.e. paint roads and building with reflective colors (minimally higher than albedo of 0.5)
- Engineering roads to be more HHS eco-friendly
- Reduce driving speeds during rain to reduce evaporation rates can also reduce KE molecules
- Change to electric cars with HHS cooler hoods
- Paint all cars metallic or white (high reflective colors)
- Move car engines to the back of the car with as little rain surface area as possible
- Improve HHS-HES irrigation to soil
- Improve vegetation in run off areas by planting millions of trees in HHS-HES areas
- Require negative population growth to reduce increase HHS-HES surfaces
- Adopt Low Impact Development (LID) in city planning and improvements for design approach aiming to mimic naturalized water balances
- Cool rain water runoff with green electricity prior to dumping it in the ocean
- Severe HHS-RWM changes are required to stop runoff into the ocean worldwide

Appendix A HES Effective Area Thought Experiment 1:

We take two identical pieces of asphalt having different albedos and areas. One is measuring 1 meter² while the second area is to be determined such that they both have the same evaporation rate when water is on the surface. The first asphalt piece is black and has an albedo of 0.05 while the second is painted white and has an albedo of 0.8. Then looking at the temperature profiles with about 1000 W/M² of sunlight falling on them, the temperature is approximated as

$$T_i(albedo) = \left(\frac{(1 - Albedo_i)Eo}{\sigma}\right)^{0.25}$$
(A1)

Taking $E_0=1000$ W/m², then T(0.05)=360°K=87°C, and T(0.8)=340°K=67°C. This shows that we have 20°C difference.

Consider now the general case with a piece of asphalt at temperature T, area A, material constant R_o in an environment with air pressure P, local relative humidity RH, and wind speed is r. Now consider a mass m of water spread uniformly on the surface. We then take the evaporation rate E for the non soluble surface approximated as

$$E = \frac{dm}{dt} = R_o A_i \exp\{-\frac{E_a}{K_b} (\frac{1}{T_i})\} f(P, RH, r)$$
(A2)

Here *f* is some function of the variables *P*, *RH*, and *r*. We take a second surface of the same material but at different temperature T and area A and look at the ratio of the evaporation rates yielding

$$E(2,1) = \frac{dm_2 / dt}{dm_1 / dt} = \frac{A_2}{A_1} \exp\{\frac{E_a}{K_b} (\frac{1}{T_{1Lower}} - \frac{1}{T_{2Upper}})\}$$
(A3)

Here we have held variable *P*, *RH*, *r*, and R_o left unchanged so they cancel. We allow $T_2 > T_1$. We then find that for A_1 to have the same evaporation rate as A_2 will occur when E(2,1)=1, so that A_1 is found just from the temperature rate as

$$A_{1} = A_{2} \exp\{\frac{E_{a}}{K_{b}}(\frac{1}{T_{1Lower}} - \frac{1}{T_{2Upper}})\}$$
(A4)

As an example, for typical water evaporation from a surface at temperature T, a common value for $E_a=40.8$ KJ/Mole=0.423eV. Using the values found above for different albedo temperatures we had T(0.05)=360°K=87°C, T(0.8)=340°K=67°C, and inserting these values into the above equation gives

$$A_1 = 2.3 A_2$$
 (A5)

Another way of saying this is that if we paint the asphalt a different color with an albedo of 0.8 compared with the typical value of black asphalt of 0.05, we actually make the area 2.3 times smaller in terms of evaporation rate which also impacts the time due to a cooler material with large specific heat. This also allows more time for water to run off and be stored in the land.

We can simplify this result and make a generalization from the above equation related to the effective area for evaporation between two surfaces, and this is

$$A_{1} = (\tau_{2} / \tau_{1}) A_{2} \tag{A6}$$

Where τ_i is the evaporation time since the rate goes as the Arrhenius function, for the ith surface at different temperatures all other evaporation factors being the same.

This is an important relation for road design, if we can slow down the evaporation rate from a road, we can decrease its effective evaporation area. Besides albedo change, other design factors can be thought of such a water runoff to land, road irrigation, road water storage similar to soil, transpiration, material changes with lower specific heat capacity. Engineering roads to be more eco-friendly is one conclusion in this paper.

Appendix B- HES Area Effect Thought Experiment 2:

We take two surfaces, one with heat capacity C_{v1} and Area A1, and the second with C_{v2} and Area A2. Both surfaces are evaporating water and start at the same temperature, however we let $C_{v2}=2C_{v1}$. What is the equivalent area if they both are required to evaporate equally for the same time period.

Time to change Q is

$$t = \frac{Q}{P} = \frac{C_{\nu}m\Delta T}{P} = \frac{C_{\nu}m\Delta T}{pA}$$
(B1)

where Q is the change in heat occurring from ΔT change, m is the mass, P is the power in Watts, p is the sunlight power in W/m², A=Area. For example for asphalt C_v = 900 J/kg K, if m=1000Kg and ΔT =20K, then ΔQ =900 J/kg K x 1000Kg x 20K=18 E6 Joules. If 1000 W/m² falls on a 1 m² surface area then the time for this temperature change is

$$t = \frac{18E6J}{1000J/\sec} = 300\,\mathrm{min} \tag{B2}$$

given that both areas have the same mass and same p, and both change by an amount ΔT then general

$$\frac{t_1}{t_2} = \frac{C_{v1}A_2}{C_{v2}A_1}$$
(B3)

if $C_{v2}=2C_{v1}$ then for $t_1=t_2$ we must have

$$A_1(C_{\nu 1}) = 2A_2(2C_{\nu 1}) \tag{B4}$$

Here we see that if Area A2 has a larger C_v , that evaporation times are only equivalent if A1 is larger proportionately. This can again be summarized by their evaporation times such that

$$A_{1} = \left(\frac{t_{1}C_{\nu 2}}{t_{2}C_{\nu 2}}\right)A_{2} = \left(\frac{t_{1C\nu}}{t_{2C\nu}}\right)A_{2}$$
(B5)

Appendix C: HES Area Effect Thought Experiment 3

Consider now the complex case of a vegetative area being replaced by an asphalt highway. The specific heat of soil and mass can vary as water evaporates. This is untrue of asphalt. The specific heat of water is

4186 J/kg K compared to asphalt =900 J/kg K. We see that soil holds heat actually 4 times larger than asphalt. However, soil heat capacity varies with precipitation (soil dry=800, soil wet=1480 J/kg K). When it rains, the asphalt cools while it evaporates water. On the other hand, the rain cools the Earth at a faster pace since soil has a lower Cv and it is less conductive below the surface where th temperature is cooler. In order to evaporate from the soil in sunlight after it rains it takes time to heat the surface area. We see that the change in heat is a complex function of time as the soils mass and Cv changes with time.

$$\frac{d\Delta Q}{dt} = (dm/dt C_v + m\frac{dC_v}{dt})\Delta T$$
(C1)

To simplify the complex problem we take an average

$$\overline{\Delta Q} = \overline{m}\overline{C_v}\Delta T \tag{C2}$$

Furthermore as water evaporates at the surface of the soil the stored water below diffuses to the top surface. Therefore the time is further lengthening by the diffusivity of water in the soil. So the equation is modified and simplified again so it is just a function of time to estimate the area ratios

$$A_{1} = \left(\frac{t_{1}\overline{Dm}\overline{C}_{v2}\overline{\Delta T}_{2}}{t_{2}mC_{v2}\overline{\Delta T}_{1}}\right)A_{2} = \left(\frac{t_{1\overline{m}}\overline{D}\overline{C}v\Delta T}{t_{2}mCv\Delta T}\right)A_{2}$$
(C3)

The result demonstrates that the area effect can be simplified to the evaporation time. For example if water evaporates from a highway in 5 hours and on land the same amount of water evaporation takes 50 hours, then lost area is a factor of 10.

Appendix D – Earth's Energy Budget 2020 & 1950 Due to Slight Albedo Change

Earth's energy budget estimates when the albedo decrease from 0.29 to 0.288 [16] we get a 0.32° F temperature increase. This feeds the HHS across the globe from roads and cities.

 $\frac{1950 \text{ Albedo=}0.29 [16]}{\text{Power Absorbed} = 0.71 \text{ x } 0.25 \text{ x } 1361 \text{ W/m2} = 241.58 \text{ Watts/m}^2} \\ \text{E=}\sigma\text{T}^4 = 241.58 \text{ W/m2}, \text{ T=}255.5^{\circ}\text{K} = 0.2^{\circ}\text{F} \\ \frac{2020 \text{ Albedo=}0.288}{\text{Power Absorbed} = 0.712 \text{ x } 0.25 \text{ x } 1361 \text{ W/m2} = 242.26 \text{ Watts/m}^2} \\ \text{E=sT}^4 = 242.26 \text{ W/m2}, \text{ T=}255.66 \text{K=}0.52^{\circ}\text{F} \\ \Delta\text{T=}0.32^{\circ}\text{F} \text{ increase in } 2020 \\ \end{array}$

Appendix E Simplified Weighted Albedo Model 1950 & 2020

Below is a simplified Albedo model to estimate the Earth's total albedo decrease with increase in city and road areas and a decrease in grass lands where the albedo decrease from 0.29 to 0.288, estimated between 2020 and 1950 respectively. Results of the simplified weighted model are given in Tables E1 and E2. Equation E1 is the weighted albedo by area, E2 is the weighted albedo with clouds.

Earth Weighted Albedo =
$$\sum_{i} (\% Earth Area_i x Surface Item Albedo_i)$$
 (E1)

Global Weighted Albedo = $Average\{(Clouds Albedo x \% Coverage) + (Earth Weighted Albedo)\}$ (E2)

Table E1: Albedo of 0.288 Year=2020

```
Table E2: Albedo of 0.29, Year=1950
```

	Enter	Enter			Enter	Enter	
	% of Weighted Albedo in		Surface	% of Earth	Albedo	Weighted Albedo in %	
Surface	Earth	Albedo		Area	(0-1)	Results	
	Area	(0-1)	Results	Water	71		
Water	70.7			Snow	12	0.8	9.60
Ice	9.8	0.6	5.88	Ice	10	0.6	6.00
Snow	11.6	0.8	9.28	Open Ocean	49	0.06	2.94
Open Ocean	49.3	0.06	2.96	Land	29.1		
Land	29.3			Roads (0.04)	0.8	0.04	0.03
Roads (0.04)	8.0	0.04	0.03	Urban Cov (0.12)	1.2	0.12	0.14
Urban Cov (0.12)	1.2	0.12	0.14	Forest (0.17)	8.6	0.17	1.46
Grass lands (0.26)	8.8	0.26	2.29	Grass lands (0.26)	8.6	0.26	2.24
Forest (0.17)	8.6	0.17	1.46	Desert (0.4)	9.9	0.4	3.96
Desert (0.4)	9.9	0.4	3.96	Sum % of Earth Area	100.1		
Sum % of Earth Area	100			Weighted Earth			26.37
Weighted Earth			26.00	Clouds (0.47)	67	0.472	31.62
Clouds (0.47)	67	0.472	31.62				Global Weighted
			Global Weighted				Albedo in %
Clobals Are se (Cloude & Weighted			Albedo in	Global=Average(Clouds &			20.00
Global=Average(Clouds & Weighted Earth) %			28.81	Weighted Earth) %			29.00
Global=Average(Clouds & Weighted				Global=Average(Clouds &			
Earth)			0.2881	Weighted Earth)			0.2900

Appendix F: Re-normalizing the Earth's Surface Albedo Area with Cities

We have described in Section 4 that the Earth's solar surface area has increased as cities are built. Essentially we have reshaped the Earth's surface with numerous tall buildings. We provided a crude example in Section 2.1 of how cities solar surface area might increase to 3% in 2019 from 1.2% in 1950. This would yield 101.8% increase in the Earth's surface area. Using the albedo model in Appendix E, Table E2 shows the original value that one might calculate for the Earth's albedo of 29% in the year 1950 [16] with a 1.2% solar surface area for urban coverage, while F1 shows the new albedo of 28.69 decrease with a renormalized urban area of 2.95% due to increase in city surface area in 2019. Table F2 shows a "what if" scenario in 2019. Here the albedo for roads and urban coverage were made more reflective to 50%. This would then impact the global albedo value to increase to 29.43%. These results demonstrate a number of important results shown in Table F3

- Actual shift from 1950 may be 0.5°F (0.7-0.2) due to Cities & Road increases, which is 33% responsible for global warming in agreement with References 18-20.
- A "what if" results that shows if we changed the albedo to 0.5 of cities and roads, total shift is 1.3°F {0.7-(-0.5). This almost solves global warming problem
- Due to improvements of specific humidity (see next section), it should actually solve most of the problem.

Overall this demonstrates that it would be non trivial to require that cities be mandated to improve their reflectivity requiring all buildings to has a higher albedo.

Table F1 2019 albedo value of 28.69%					
	Enter	Enter			
Surface	% of Earth	Albedo	Weighted Albedo in %		
	Area	(0-1)	Results		
Water	69.45				
Snow	11.39	0.8	9.11		
Ice	9.63	0.6	5.78		
Open Ocean	48.43	0.06	2.91		
Land	30.55				
Roads (0.04)	0.78	0.04	0.03		
Urban Cov (0.12)	2.95	0.12	0.35		
Forest (0.17)	8.45	0.17	1.44		
Grass lands (0.26)	8.64	0.26	2.25		
Desert (0.4)	9.72	0.4	3.89		
Sum % of Earth Area	99.99				
Weighted Earth			25.75		
Clouds (0.47)	67	0.472	31.62		
			Global Weighted		
			Albedo in %		
Global=Average(Clouds & Weighted Earth) %			28.69		
Global=Average(Clouds & Weighted Earth)			0.2869		

Table F2: 2019 Albedo value of 29.43if Roads and Cities reflectivity were 50%

	Enter	Enter	
Surface	% of Earth	Albedo	Weighted Albedo in %
	Area	(0-1)	Results
Water	69.45		
Snow	11.39	0.8	9.11
Ice	9.63	0.6	5.78
Open Ocean	48.43	0.06	2.91
Land	30.55		
Roads (0.04)	0.78	0.5	0.39
Urban Cov (0.12)	2.95	0.5	1.48
Forest (0.17)	8.45	0.17	1.44
Grass lands (0.26)	8.64	0.26	2.25
Desert (0.4)	9.72	0.4	3.89
Sum % of Earth Area	99.99		
Weighted Earth			27.23
Clouds (0.47)	67	0.472	31.62
			Global Weighted
			Albedo in %
Global=Average(Clouds & Weighted Earth) %			29.43
Global=Average(Clouds & Weighted Earth)			0.2943

Year	Surface Area of Cities	Albedo Roads	Albedo Urban Coverage	Global Albedo	Temperature*
1950	1.20%	0.04	0.12	29%	0.2°F
2019	2.95% *	0.04	0.12	28.69	0.7°F
2019	2.95% *	0.5	0.5	29.43	-0.5°F

Table F3 Summary of albedos in Tables F1-F3 and associated temperature energy budgets

*where Temp is given by: $P_{Total} = 1361 \text{W/m2} \{0.25 \text{ x } 1\text{-Albedo}\} = \sigma T^4$

Appendix G: Example of Hotspot Local Relative Humidity in Cities and Streets

Example: If the ambient temperature when it rains is 27°C and 98%RH and the HHS surface temperature is 87°C (black asphalt, see Table 1), then the local relative humidity at the hotspot surface is reduced from 98%RH to 5.6%RH! Such cumulative effect from buildings and streets in a city likely will lower city's relative humidity compared to nearby rural areas. Studies could measure to see how dramatic this effect is.

The following equations were used for this estimate [15] HHS local %RH to 5.6%:

HHS _{RH} = RHamb
$$\frac{P_{sat}(T_{amb})}{P_{sat}(T_{HHS})}$$

Here HHS_{RH} is the hydro-hotspot's local %RH, RH_{amb} is the ambient %RH, and P_{sat} is in KiloPascals defined as

$$P_{sat}(T) = e^{(a + \frac{b}{T} + \frac{c}{T^2} + \frac{d}{T^3})}$$

Where a=16.033225, b=-3515.138, c=-290850.583, d=5097236.05, and T=Temperature in ^oK. Psat can also be obtained from standard tables.

If we have some average of local relative humidity mixed with the environmental average the new specific humidity x_{new} is

$$X_{New} = \frac{Q_{city} X_{city} + Q_{env} X_{env}}{Q_{city} + Q_{env}}$$

where Q is the volume of air (m^3) , Xs are the specific humidity or humidity ratio $kg_{water}/kg_{dry-air}$, which can be converted to relative humidity.

On average for large cities, these hotspots are likely to bring down the cities relative humidity. A lower relative humidity is correlated to more greenhouse gas in the atmosphere and global warming.

Appendix H: Evaporation Rate of Cities Vs. Ocean

The following formula is a simplified formula of the Evaporation Rate of Cities (Ec) vs that of the Ocean Eo, we make comparison between 1950 and 2020. We see that if the evaporation rate in cities is increasing, it may be more responsible for the added GH moisture gas in our atmosphere.

$$HHS_{effect-o}(1950) = \frac{E_{o}}{E_{c}} = \frac{A_{o}}{A_{c}} R(T_{o}, T_{HHS}) \frac{E_{WO}}{E_{WC}} \frac{RH_{c}}{RH_{o}} = 40.8x.46x20x0.5 = 188$$
$$HHS_{effect-o}(2020) = \frac{E_{o}}{E_{c}} = \frac{A_{o}}{A_{c}} R(T_{o}, T_{HHS}) \frac{E_{WO}}{E_{WC}} \frac{RH_{c}}{RH_{o}} = 16.3x.46x20x0.5 = 75$$

E₀,E_C=Evaporation Rate of Ocean, Evaporation Rate of Cities

AO, AC= Surface Area of Ocean, Area of City Surfaces (Ao/AC=49%/3%=16.3 in 2020, Ao/AC=49%/1.2%=40.8 in 1950)

 $R(T_0=60C, T_{HHS}=80)$ Acceleration temperature factor between Ocean and Cities (Arrhenius function) ~ 2.2 E_{WO} , $E_{WC}=$ Percent of time surface exposed to water, $E_{WO}=100\%$, $E_{wc}=5\%$ ~20 RH_C , $RH_0=$ Local relative humidity of ocean and RH of city near surface ~40/80

This crude example illustrates the need for some studies. In 1950 the cities had a small effect of evaporation changes compared to cities in 2020. Results on this hypothetical example illustrate a factor of

2.5 higher 2020 compared to 1950 on the contribution to an increase in evaporation rate from cities over the ocean.

References

[1] M. P. Byrne and P. A. O'Gorman, Trends in continental temperature and humidity directly linked to ocean warming, *Proc. Of the National Academy of Sciences*, April 23, 2018. https://www.pnas.org/content/115/19/4863

Also see **M.** P. Byrne and **P.** A. O'Gorman, Understanding Decreases in Land Relative Humidity with Global Warming: Conceptual Model and GCM Simulations, AMS, 2016 (and references therein).

[2]A.E. Dessler, Z, Zhang, P. Yang, Water-vapor climate feedback inferred from climate fluctuations, 2003–2008, - *Geophysical Research Letters*, 2008, Wiley Online Library.

[3] AE Dessler, Observations of climate feedbacks over 2000–10 and comparisons to climate models, *Journal of Climate*, 2013

[4] A.E. Dessler, The physics of climate change, Dept of Atmosphere Science, Texas A&M, Sept., 2015, Youtube.

[5] K. Willett, A. Simmons, and D. Berry, 2014: [Global climate] Surface humidity [in "State of the Climate in 2013"]. *Bull. Amer. Meteor. Soc.*, 93 (7), S19–S20.

[6] K Hansen, A. Copeland, Annual Asphalt Pavement Industry Survey on Recycled Materials and Warm-Mix Asphalt Usage: 2009-2012 National Asphalt Pavement Assoc. Dec 2013

[7] US DOT, Fed Highway Admin., Highway Finance Data Collection, *Data Source: FHWA*, *Office of Bridge Technology*, *National Bridge Inventory* 2011 https://www.fhwa.dot.gov/policyinformation/pubs/hf/pl11028/chapter1.cfm

[8] Andy May, Does Global Wrming increase total atmospheric water vapor (TPW)? June 2018, https://andymaypetrophysicist.com/2018/06/09/does-global-warming-increase-total-atmospheric-water-vapor-tpw/

[9] R. Hanson, U.S. Geological Survey, Evapotranspiration and Droughts, 1991, Evapotranspiration and Droughts, in Paulson, R.W., Chase, E.B., Roberts, R.S., and Moody, D.W., Compilers, *National Water Summary* 1988-89-Hydrologic Events and Floods and Droughts: *U.S. Geological Survey Water-Supply*, 2375, 99-104. https://geochange.er.usgs.gov/sw/changes/natural/et/,

[10] Reporter, It's Been Raining in NYC: Where Does All That Water Go? *New York Environment Report*, July 3, 2014 https://www.nyenvironmentreport.com/its-been-raining-in-nyc-where-does-all-that-water-go/

[11] H. Fry, A. Reyes-Velarde, California wastes most of its rainwater, which simply goes down the drain, *LA. Times*, Feb. 2019.

[12] C.X. Cao, J. Zhao, P. Gong, G. R. MA, D.M. Bao, K.Tian, Wetland changes and droughts in southwestern China, *Geomatics, Natural Hazards and Risk*, Oct 2011, https://www.tandfonline.com/doi/full/10.1080/19475705.2011.588253

[13] M. Hirshi, S.I. Seneviratne, V Alexandrov, F. Boberg, C. Boroneant, O.B. Christensen, H. Formayer, B. Orlowsky & P. Stepanek, Observational evidence for soil-moisture impact on hot extremes in southeastern Europe, *Nature Geoscience* 4, 17-21 (2011).

[14] Reporter, Stormwater innovations mean cities don't just flush rainwater down the drain, **The Conversation**, May 2015, http://theconversation.com/stomwater-innovations-mean-cities-dont-just-flush-rainwater-down-the-drain-40129

[15] C.G. Shirley, The Reliability Models and Life Prediction, Intermittently-Powered Non-Hermetic Components, Proceedings of IRPS-1994, pg.72., Also see JESD94B, Jedec.org.

[16] Earth albedo 29%, from book, Climate Chane (2nd edition) S. Cohen, G. Stanhill, 2016.

[17] T. Hiyama et. al., Analysing the origin of rain- and subsurface water in seasonal wetlands of north-central, Namibia, 2017, Environ. Res. Lett. **12** 034012

[18] R. R. McKitrick, P. J. Michaels, Quantifying the influence of anthropogenic surface processes and inhomogeneities on gridded global climate data, JOURNAL of Geophysical Research-Atmospheres, Dec. 2007

- [19] Huang, Q.; Lu, Y. (2015). "The Effect of Urban Heat Island on Climate Warming in the Yangtze River Delta Urban Agglomeration in China". International Journal of Environmental Research and Public Health. 12 (8): 8773– 8789.
- 2. [20] Z.C. Zhao, Impacts of urbanization on climate change, 10,000 Scientific Difficult Problems: Earth Science (in Chinese), Science Press, (2011) pp. 843–846

[21] Columbia University Socioeconomic Data and Applications Center, Gridded Population of the World and the Global Rural-Urban Mapping Project (GRUMP).

Biography: Alec Feinberg is the founder of DfRSoft. He has a Ph.D. in Physics and is the principal author of the books, Design for Reliability and Thermodynamic Degradation Science: Physics of Failure, Accelerated Testing, Fatigue, and Reliability Applications. Alec has presented numerous technical papers and won the 2003 RAMS best tutorial award for the topic, "Thermodynamic Reliability Engineering."